



## Husqvarna 535LK

High-powered, heavy duty professional combi trimmer with reliable X-Torq® engine. Quick connection system compatible with existing Husqvarna attachments for maximum versatility and maximum productivity. Anti-vibration system and soft-grip handles ensure comfortable use even during long shifts.



### Metal skid plate

Durable metal skid plate protects the engine and fuel tank.



### Detachable Shaft

Easily breaks down for safer transport and compact storage


### Multi purpose

Versatile product thanks to the numerous tools available as accessories.



### Auto return stop switch

When the stop switch has been used, it is automatically reset to ON to facilitate the next start.

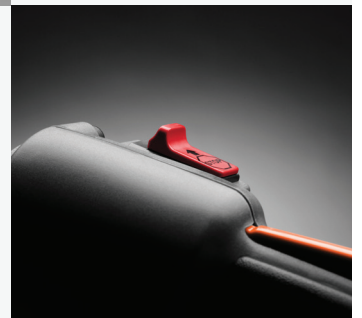

## FEATURES

- Versatile product thanks to the numerous tools available as accessories.
- Easily breaks down for safer transport and compact storage
- Skid plate for engine protection
- When the stop switch has been used, it is automatically reset to ON to facilitate the next start.
- Easy to service and maintain starter
- With Tap'n Go, line feeding is done effortlessly by simply pushing the trimmer head into the ground.
- Transparent fuel tank makes it easy to check the fuel level.
- Fuel pump for easy starting
- Comfortable handles
- Great power and efficiency

Technical Specifications	
<b>CAPACITY</b>	
Clutch engagement speed ( $\pm 120$ )	4300 rpm
Idling speed	2900 rpm
Maximum power speed	8400 rpm
Maximum rpm output shaft	8300 rpm
Output shaft thread	M10x1.25V
Output shaft power	1.4 kW
Torque, max.	1.9 Nm
Torque, max. at rpm	6600 rpm
<b>DIMENSIONS</b>	
Article gross weight	9600 g
Article net weight	5800 g
Cutting width	45 cm
Tube length	1483 mm
Tube diameter	24 mm
Weight (excl. cutting equipment)	5.8 kg
<b>ENGINE</b>	
Cylinder bore	38 mm
Cylinder displacement	34.6 cm <sup>3</sup>
Cylinder stroke	30.5 mm
Electrode gap	0.5 mm
Engine Family CARB	MHVXS.0354EE
Engine Family EPA	MHVXS.035EE
Ignition module air gap	0.3 mm
Spark Plug	Champion RCJ6Y
<b>EQUIPMENT</b>	
Drive gear angle	30°
Gear ratio	1.41
Trimmer head	T35 M10
Output shaft thread	M10x1.25V
<b>LUBRICANTS</b>	
Fuel consumption	475 g/kWh
Fuel tank volume	0.6 l
Lubricant type (bevel gear)	Mineral grease
Lubricant type (Engine)	Husqvarna 2 stroke or equiv. at 50:1
<b>PACKAGING</b>	
Packaging height	279 mm
Packaging length	1803 mm
Packaging width	330 mm
Quantity in Master pack	1
<b>EMISSION DATA CARB</b>	
Engine Family EPA	MHVXS.035EE
Engine Family CARB	MHVXS.0354EE
Exhaust emissions (CO average) CARB	243.69 g/kWh
Exhaust emissions (CO average) CARB	1029 g/kWh
Exhaust emissions (HC average) CARB	29.31 g/kWh
Exhaust emissions (NOx average) CARB	1.09 g/kWh
<b>EMISSION DATA EPA</b>	
Exhaust emissions (CO average) EPA	243.69 g/kWh
Exhaust emissions (CO FEL) EPA	536 g/kWh
Exhaust emissions (CO average) EPA	1029 g/kWh
Exhaust emissions (HC average) EPA	29.31 g/kWh
Exhaust emissions (NOx average) EPA	1.09 g/kWh
<b>EMISSION DATA EU</b>	
Exhaust emissions (CO average) EU	418.31 g/kWh
Exhaust emissions (CO average) EU	862 g/kWh
Exhaust emissions (CO EU V)	862 g/kWh
Exhaust emissions (HC average) EU	40.51 g/kWh
Exhaust emissions (NOx average) EU	0.46 g/kWh
<b>MATERIALS</b>	
Master pack: Paper material	0 g
Metal total	0 g
Paper material total	0 g

**Technical Specifications**

HDPE (02) total	0 g
PET (01) total	0 g
Plastic foil total	0 g
Plastic rigid total	0 g
Plastic total	0 g
PS/EPS/HIPS (06) total	0 g
<b>SOUND AND NOISE</b>	
Sound power level, guaranteed (LWA)	114 dB(A)
Sound power level, measured	111 dB(A)
Sound pressure level at operators ear	99 dB(A)
<b>VIBRATIONS</b>	
Daily Vibration (Aeqv)	4.5 m/s <sup>2</sup>
Daily Vibration Exposure (A8)	3.2 m/s <sup>2</sup>
Daily Vibration Time (Time factor)	4 h
Equivalent vibration level (ahv, eq) front handle	4.5 m/s <sup>2</sup>
Equivalent vibration level (ahv, eq) rear handle	3.9 m/s <sup>2</sup>